



108RCK.1-I913



Wall mounted luminaries with symmetrical light distribution to achieve an effective task or general lighting. Neutral cylindrical body in diameter 80mm. Sandblasted metalized aluminium reflector silver finished. Powder painted aluminium profile available in assorted finishes, customized RAL under request. Built-in driver, included. Electronic options for lighting control: DALI/DSI. Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture body itself. Wall mounted by aluminium mounting plate with two fixing points. Cable entry through the aluminium wall mounting plate. ROCKET can be combined with the KERI pendant line and the GOTA surface mounted fixtures to get a harmonious finish.

Fixture power: 6.5 W

Constant Current: 200 mA

Luminous flux of the light source: 1195lm

Luminous flux of the fixture: 741lm

CRI: >80

Colour Temperature: 4000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 38°

LOR: 62%

Average Service Life: 50000h

LED reliability: 55000h L80B10

Photobiological safety group: 1

Cd/Klm: 1077

Luminous efficacy: 114 lm/W

Imax: 1287 Cd

This product contains a light source of energy efficiency class A++


Electronic Equipment

D: DALI-2/DSI switchDIM/corridorFUNCTION


*Add the suffix **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

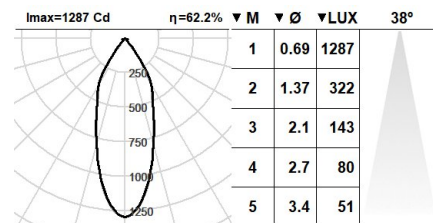

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 20.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarrà
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com