
Recessed downlights





103QID.1-R864

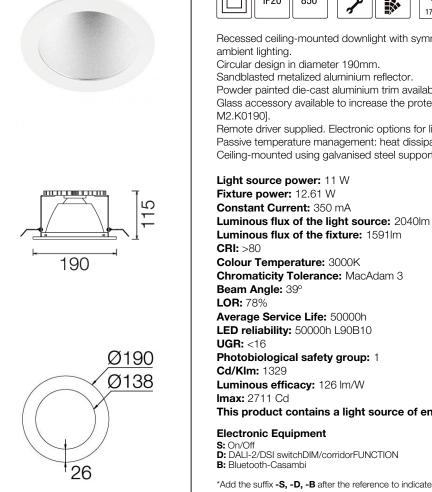

Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task or ambient lighting.


Circular design in diameter 190mm.

Sandblasted metalized aluminium reflector.

Powder painted die-cast aluminium trim available in assorted finishes.

Glass accessory available to increase the protection rating to IP54 from underneath [reference M2.K0190]

Remote driver supplied. Electronic options for lighting control: DALI/DSI. Passive temperature management: heat dissipation flows through aluminium heat sink. Ceiling-mounted using galvanised steel support with spring clamps.



Luminous efficacy: 126 lm/W Imax: 2711 Cd

This product contains a light source of energy efficiency class D

Electronic Equipment

S: On/Off D: DALI-2/DSI switchDIM/corridorFUNCTION B: Bluetooth-Casambi

*Add the suffix -S, -D, -B after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 18.04.2024]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Spain

08540 Centelles | Barcelona

Ronda de la Font Grossa, 15 Pol. Ind. La Gavarra

Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com