

851RNA.1-I737



Linear projectors with symmetrical light distribution to achieve an effective task or general lighting.
 Linear fixture in 569mm length and in a width of 55mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 Opal polycarbonate diffuser.
 Highly efficient linear printed circuit board.
 Built-in driver, included.
 Electronic options for lighting control: DALI-2.
 Passive temperature management.
 Ceiling or wall installation with adjustable fixing brackets.

Light source power: 16 W
Luminaire connected power: 17.21 W
Constant Current: 350 mA
Light source luminous flux: 2575lm
Luminaire luminous flux: 1364lm
CRI: 80
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 103°
LOR: 60%

Average Service Life: 50000h
LED reliability: >60000h L80B10
UGR: <19 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.55m

Photobiological safety group: 1
Luminaire efficiency: 79 lm/W

This product contains a light source of energy efficiency class D


Electronic Equipment

S: On/Off
D: DALI-2/switchDIM/corridorFUNCTION


*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

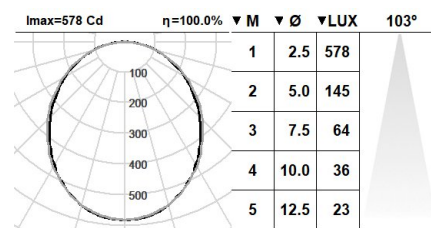

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 25.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com