

539KTA.1-I836



Pendant linear fixtures with symmetrical light distribution to achieve an effective accent, task or general lighting. Double light emission: up and down.
 Linear fixture in 2808mm length and in a width of 44mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 PMMA optics for controlling and directing the light.
 Highly efficient linear printed circuit board.
 Accessories available to create customized linear systems.
 Built-in driver, included.
 Electronic options for lighting control: DALI-2 (for downlight position only) (two DALI addresses) .
 3 hours battery available as option.
 Passive temperature management.
 Ceiling-mounted with adjustable steel wire suspension (1m) and transparent electrical wire. Different suspension length on request.
 Other options available:
 Frameless.
 Frameless recessed.
 Surface-mounted
 Wall-mounted.
 It is possible to combine different lengths and junction modules in different ways to create customized design.

Light source power: 32 W

Fixture power: 35.52 W

Constant Current: 150 mA

Luminous flux of the light source: 6010lm

Luminous flux of the fixture: 5589lm

CRI: 80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 43°

LOR: 93%

Average Service Life: 50000h

LED reliability: >60000h L80B10

UGR: <19 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.3m


Photobiological safety group: 1

Cd/Klm: 704

Luminous efficacy: 157 lm/W

Imax: 4231 Cd

This product contains a light source of energy efficiency class C

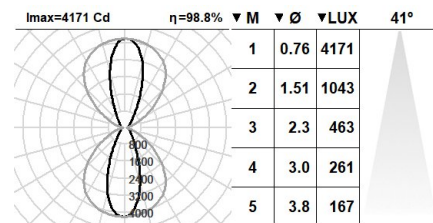

Electronic Equipment

S: On/Off

SE: On/Off + 3h battery

D: DALI-2/switchDIM (only downlight position)(two DALI-2 addresses)

DE: DALI-2/switchDIM+ 3 hours battery


DDE: DALI-2/switchDIM+ 3 hours battery (DALI)

*Add the suffix **-S, -SE, -D, -DE, -DDE** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 23.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com