


TIRET 400

IP20 Pendant linear downlights




451TRT.1-I729

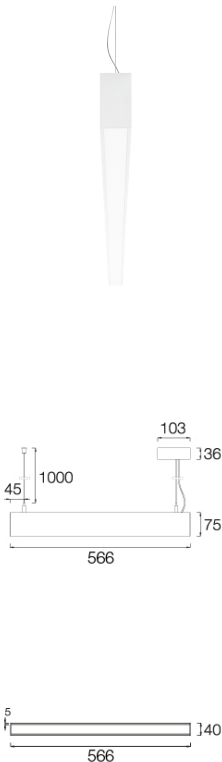

Pendant linear downlights with symmetrical light distribution to achieve an effective task or general lighting.
 Linear fixture in 566mm length and in a width of 40mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 Opal extruded polycarbonate diffuser.
 Highly efficient linear printed circuit board.
 Accessories available to create customized linear systems.
 Built-in driver, included.
 Electronic options for lighting control: DALI/DSI.
 Passive temperature management.
 Ceiling-mounted with adjustable steel wire suspension (1 m) and transparent electrical wire. Different suspension length on request.
 It is possible to combine different lengths and junction modules in different ways to create customized systems.

Light source power: 6 W
Fixture power: 7.1 W
Constant Current: 150 mA
Luminous flux of the light source: 1080lm
Luminous flux of the fixture: 680lm
CRI: 90
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 91°
LOR: 63%
Average Service Life: 50000h
LED reliability: >72000h L80B10
UGR: <19 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.45m
Photobiological safety group: 1
Cd/Klm: 443
Luminous efficacy: 96 lm/W
This product contains a light source of energy efficiency class D

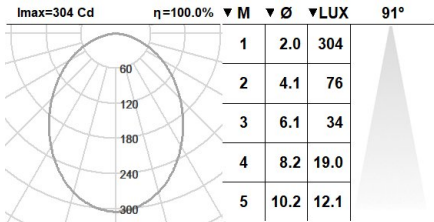

Electronic Equipment

S: On/Off
D: DALI-2/DSI switchDIM/corridorFUNCTION

*Add the suffix **-S, -D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
 Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact
 T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com