


TIRET 600

IP40 Wall-mounted linear fixtures

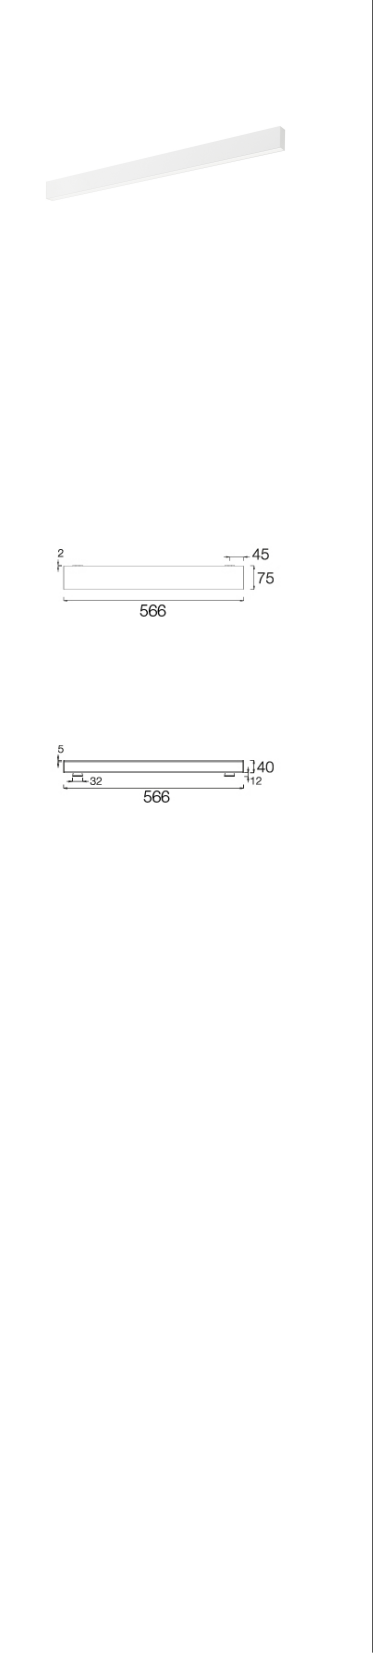

651TRT.1-I738

IP40

650°

+RAL

2.22Kg

Wall-mounted linear downlights or uplights with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 566mm length and in a width of 40mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.

Opal extruded polycarbonate diffuser.

Highly efficient linear printed circuit board.

Accessories available to create customized linear systems.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

Passive temperature management.

Wall mounted by mounting brackets.

It is possible to combine different lengths and junction modules in different ways to create customized systems.

Light source power: 16 W

Fixture power: 17.21 W

Constant Current: 350 mA

Luminous flux of the light source: 2650lm

Luminous flux of the fixture: 1670lm

CRI: 80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 91°

LOR: 63%

Average Service Life: 50000h

LED reliability: >72000h L80B10

UGR: <19 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.7m

Photobiological safety group: 1

Cd/Klm: 443

Luminous efficacy: 97 lm/W


Imax: 1174 Cd

This product contains a light source of energy efficiency class C

Electronic Equipment

S: On/Off

D: DALI-2/switchDIM/corridorFUNCTION

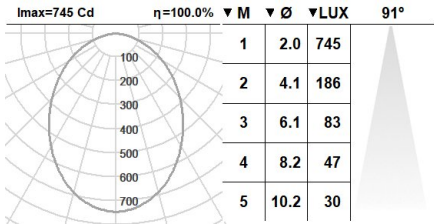


*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 23.04.2024]

5 years guarantee