

661BRS.1-I723



Wall mounted linear fixtures with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 568mm length and in a width of 44mm.

Protection rating against dust and moisture: complete IP54.

Protection rating of resistance to harmful mechanical impacts: IK08.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.

Microprismatic polycarbonate diffuser.

Highly efficient linear printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI/DSI.

Passive temperature management.

Accessory for serial installation, reference F3.L6.BRS.

Light source power: 6 W

Fixture power: 7.1 W

Constant Current: 150 mA

Luminous flux of the light source: 1165lm

Luminous flux of the fixture: 793lm

CRI: 80

Colour Temperature: 2700K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 98°

LOR: 68%

Average Service Life: 50000h

LED reliability: >60000h L80B10

UGR: <19 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.85m

Photobiological safety group: 1

Cd/Klm: 499

Luminous efficacy: 112 lm/W

Imax: 582 Cd

This product contains a light source of energy efficiency class D

Electronic Equipment

S: Standard

SE: On/Off + 3 hours battery

D: DALI-2/DSI/switchDIM(two DALI addresses)

DE: DALI-2/DSI/switchDIM+3 hours battery (two DALI addresses)

DDE: DALI-2/DSI/switchDIM+3 heures (DALI) (three DALI addresses)





There are accessories available for dimming devices.

*Add the suffix **-S, -SE, -D, -DE, -DDE** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable

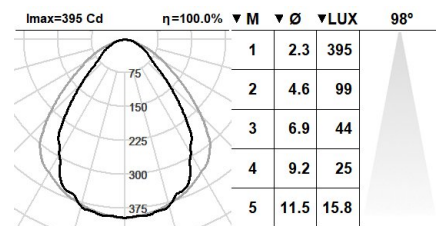

Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 29.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com