
# TIRET SOO





## 851TRT.1-I738

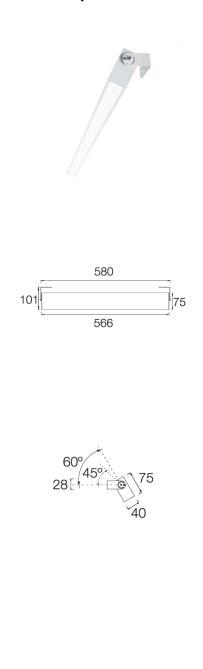

Linear projectors or uplights with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 566mm length and in a width of 40mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Opal extruded polycarbonate diffuser.

Highly efficient linear printed circuit board. Built-in driver, included.

Electropic options for lig

Electronic options for lighting control: DALI/DSI. Passive temperature management.


Wall mounted by adjustable mounting brackets.

- Matching products:
- TIRET 100 recessed.

TIRET 200 frameless recessed. TIRET 300 surface mounted.

TIRET 400 and TIRET 500 pendant. TIRET 600 and TIRET 700 wall-mounted. TIRET 800 projectors.

Light source power: 16 W Fixture power: 17.21 W Constant Current: 350 mA Luminous flux of the light source: 2650lm Luminous flux of the fixture: 1670lm CRI: 80 Colour Temperature: 3000K Chromaticity Tolerance: MacAdam 3 Beam Angle: 91° LOR: 63% Average Service Life: 5000h LED reliability: >72000h L80B10 UGR: <19 under the below indicated parameters



Imax: 1174 CdThis product contains a light source of energy efficiency class C

#### Electronic Equipment

Room dimensions X=4H/8H Reflectance 20% | 50% | 70% Luminaire spacing = 0.7m

S: On/Off D: DALI-2/DSI switchDIM/corridorFUNCTION

Photobiological safety group: 1

Luminous efficacy: 97 lm/W

\*Add the suffix -S, -D after the reference to indicate your electronic equipment choice.

#### Finishes

Cd/Klm: 443

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

#### Upgradeable, Replaceable, Repairable



#### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

# 5 years guarantee **CE** BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

# ROVASI S.L.

Pol. Ind. La Gavarra

Spain

08540 Centelles | Barcelona

Ronda de la Font Grossa, 15 T. +34

### Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com