
SATELLITE Surface mounted downlights



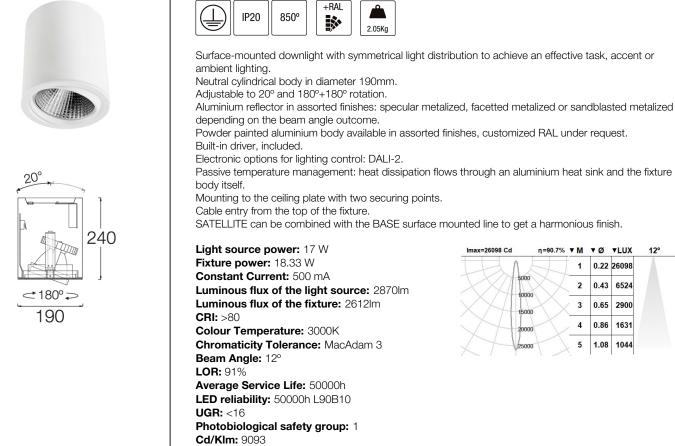

101STL.1-I870

max=26098 Cd	η=90.7%	▼ M	VØ	▼LUX	12°
ALA	FI	1	0.22	26098	
50		2	0.43	6524	
~ 10	000	3	0.65	2900	
20	000	4	0.86	1631	
25	000	5	1.08	1044	

This product contains a light source of energy efficiency class D

Electronic Equipment S: On/Off

Imax: 26097 Cd

D: DALI-2/switchDIM/corridorFUNCTION

Luminous efficacy: 142 lm/W

*Add the suffix -S, -D after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 25.04.2024]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

Ronda de la Font Grossa, 15

08540 Centelles | Barcelona

T. +34 93 881 35 12 T. +34 93 881 37 13

Contact

info@rovasi.com www.rovasi.com