

821HRN.1-I989



Linear projectors with symmetrical light distribution to achieve an effective task or general lighting.
Frameless linear fixture in 576mm length and in a width of 50mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Range of PMMA optics to achieve specific photometric results.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI-2.
Passive temperature management.
Ceiling-mounted using adjustable supports.
Matching products:
HORIZON 100 recessed.
HORIZON 300 surface mounted.
HORIZON 400 and HORIZON 500 pendant.
HORIZON 600 and HORIZON 700 wall-mounted.

Light source power: 20 W
Fixture power: 23.25 W
Constant Current: 700 mA
Luminous flux of the light source: 2850lm
Luminous flux of the fixture: 2765lm
CRI: 90
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 31°
LOR: 97%
Average Service Life: 50000h
LED reliability: >54000h L80B10
UGR: <19
Photobiological safety group: 1
Cd/Klm: 2060
Luminous efficacy: 119 lm/W
Imax: 5871 Cd

This product contains a light source of energy efficiency class D


Electronic Equipment

D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

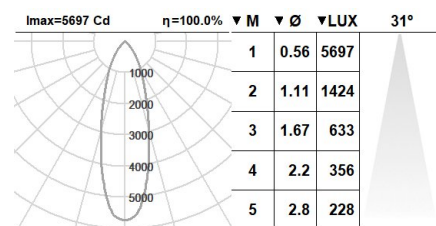

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 24.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com