



101HDN.1-R526



Recessed ceiling-mounted multiDirectional downlights with symmetrical light distribution to achieve an effective task, accent or general lighting.
Square design in 110mm x 110mm.
Swivel mounted downlights, adjustable up to 25° and with 180° rotation.
Die-cast aluminium trim and recessing surface powder painted in assorted finishes, customized RAL under request.
Honeycomb anti-dazzle screen accessory to increase visual comfort [reference M6.A0050].
Electronic options for lighting control: DALI/DSI.
3 hours battery available as option.
Passive temperature management: heat dissipation flows through an aluminium heat sink.
Ceiling-mounted with spring clamps for easy installation.

Light source power: 5 W
Fixture power: 5.66 W
Constant Current: 150 mA
Luminous flux of the light source: 520lm
Luminous flux of the fixture: 520lm
CRI: >90
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 36°
LOR: 100%
Average Service Life: 50000h
LED reliability: >50000h L70B50
UGR: <16
Photobiological safety group: 1
Cd/Klm: 2100
Luminous efficacy: 92 lm/W
Imax: 1092 Cd
This product contains a light source of energy efficiency class F

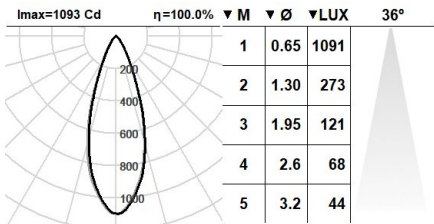

Electronic Equipment
K: On/Off (basic)
S: On/Off (AC/DC)
SE: On/Off (AC/DC) + Battery 3h
D: DALI-2/DSI switchDIM/corridorFUNCTION
DE: DALI-2/DSI switchDIM + 3h battery
B: Bluetooth-Casambi

\*Add the suffix -K, -S, -SE, -D, -DE, -B after the reference to indicate your electronic equipment choice.
Finishes
2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note