


101BSE.1.01-R634



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent.
3 hours battery available as option.
Passive temperature management: heat dissipation flows through an aluminium heat sink.
Ceiling-mounted by spring clamps for easy installation, ceiling thickness up to 25mm.

Light source power: 6.6 W
Fixture power: 7.69 W
Constant Current: 200 mA
Luminous flux of the light source: 670lm
Luminous flux of the fixture: 670lm
CRI: >90
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 36°
LOR: 100%
Average Service Life: 50000h
LED reliability: >50000h L70B50
UGR: <19
Photobiological safety group: 1
Cd/Klm: 2100
Luminous efficacy: 87 lm/W
Imax: 1407 Cd

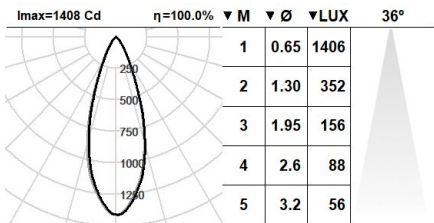

This product contains a light source of energy efficiency class F

Electronic Equipment

K: On/Off (basic)
S: On/Off (AC/DC)
SE: On/Off (AC/DC) + Battery 3h
D: DALI-2/DSI switchDIM/corridorFUNCTION
DE: DALI-2/DSI switchDIM + 3h battery
B: Bluetooth-Casambi

*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com