



# SEAL SQ

IP65 Small recessed downlights

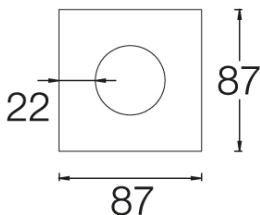

## 103SSQ.1.01-R620

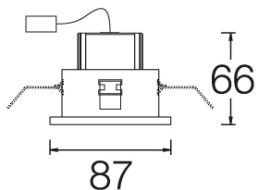


Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent.

Passive temperature management: heat dissipation flows through an aluminium heat sink.

Ceiling-mounted by spring clamps for easy installation.

**Light source power:** 6.6 W  
**Luminaire connected power:** 7.69 W  
**Constant Current:** 200 mA  
**Light source luminous flux:** 720lm  
**Luminaire luminous flux:** 720lm  
**CRI:** >90  
**Colour Temperature:** 4000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 24°  
**LOR:** 100%  
**Average Service Life:** 50000h  
**LED reliability:** >50000h L70B50  
**UGR:** <16  
**Photobiological safety group:** 1  
**Cd/Klm:** 3767  
**Luminaire efficiency:** 94 lm/W  
**Imax:** 2712 Cd  
**This product contains a light source of energy efficiency class F**

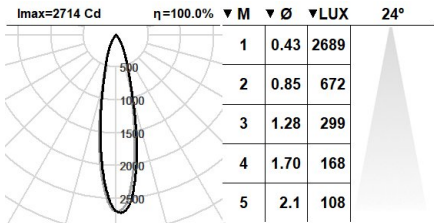

### Electronic Equipment


**K:** On/Off (basic)  
**S:** On/Off (AC/DC)  
**SE:** On/Off (AC/DC) + Battery 3h  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**DE:** DALI-2/switchDIM + 3h battery  
**B:** Bluetooth-Casambi

\*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

### Finishes

**2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

### Upgradeable, Replaceable, Repairable



#### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 25.04.2024]

#### 5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346  
BSI Cert ISO 14001:2015 - n°EMS 554685

#### ROVASI S.L.

Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

#### Contact

T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 www.rovasi.com