



BSM OPTIMAL DISPLAY

Trimless appearance recessed downlights




106BSM.1-R1152



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent or ambient lighting.
Circular design with trimless appearance in diameter 141mm.
Aluminium circle powder painted in assorted finishes, customized RAL under request.
To complete the effect of this fixture, it is suggested that the circle be painted the same RAL colour as the ceiling.
Aluminium interior reflector available in assorted finishes: faceted metalized or sandblasted metalized depending on the beam angle outcome.
Accessory available to increase the protection rating to IP44 from underneath [reference M2.A0141].
Remote driver supplied. LED module for special applications.
Electronic options for lighting control: DALI/DSI.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Ceiling-mounted using galvanised steel support with screws.

Light source power: 11 W
Fixture power: 12.61 W
Constant Current: 350 mA
Luminous flux of the light source: 1530lm
Luminous flux of the fixture: 1392lm
CRI: 97
Colour Temperature: ART 3000K
Chromaticity Tolerance: MacAdam 2
Beam Angle: 24°
LOR: 91%
Average Service Life: 50000h
LED reliability: 51000h L80B10
Photobiological safety group: 1
Cd/Klm: 3580
This product contains a light source of energy efficiency class F

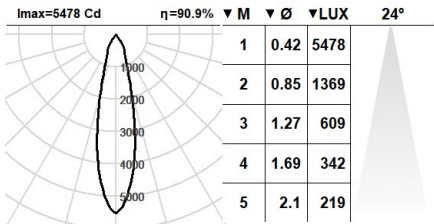


Electronic Equipment

S: On/Off (AC/DC + looping)
K: On/Off (basic)
D: DALI-2/DSI/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi
SE: On/Off (AC/DC + looping) + 3 hours battery (class I)
DE: DALI-2/DSI/switchDIM/corridorFUNCTION + 3 hours battery (class I)
There are accessories available for dimming devices.
*Add the suffix **-S, -K, -D, -B, -SE, -DE** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com