



101SMM.1-I870



Pendant downlight with symmetrical light distribution to achieve an effective task or ambient lighting. Facetted metallized aluminium reflector to control and direct the light.

Powder painted aluminium body available in assorted finishes, customized RAL under request.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0.4$.

Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture body itself.

Delivered with 1 meter steel cord suspension as standard and Transparent electronic wire. Mounted to the ceiling by cylindrical ceiling rose.

For a more dynamic result, it can be supplied with an adapter for three-phase track [reference M3.B].

Luminaire luminous flux: 2612lm

Luminaire connected power: 18.33 W

Luminaire efficiency: 142 lm/W

Light source luminous flux: 2870lm

Light source power: 17 W

Constant Current: 500 mA

CRI: >80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 12°

LOR: 91%

LED reliability at nominal Ta = 25°C: 50000h L90B10


UGR: <16

Photobiological safety group: 1

Cd/Klm: 9093

Imax: 26097 Cd

This product contains a light source of energy efficiency class D

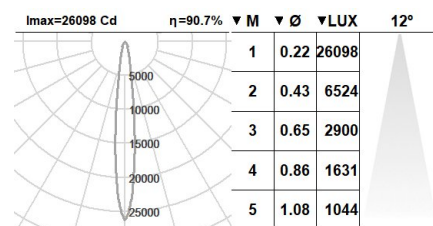

Electronic Equipment

S: On/Off

D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 03.07.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarrà
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com