

953KBR.22-11225



Linear downlights with 3-phase track adapter with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 844mm length and in a width of 50mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Modular optics in 21 cells in black finish designed to ensure visual comfort.
Blind covers available with a length of 280mm or its multiples: accessory reference M5.Y.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI-2 or Bluetooth.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0.4$.
Passive temperature management.
Three-phase tracks are available as well as accessories to create a custom system.


Luminaire luminous flux: 1461lm
Luminaire connected power: 11,12 W
Luminaire efficiency: 131 lm/W
Light source luminous flux: 1605lm
Light source power: 8,4 W
Constant Current: 150 mA
CRI: 80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam3
Beam Angle: 78°
LOR: 91%

LED reliability at nominal Ta = 25°C: 90.000h L80B10
Photobiological safety group: 1
This product contains a light source of energy efficiency class C

Electronic Equipment
S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S, -D, -B** after the reference to indicate your electronic equipment choice.

Finishes
22: Black frame - Black reflector

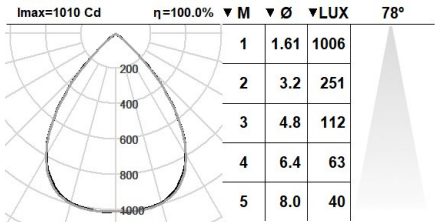

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 16.09.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com