
TIRET SOO





851TRT.1-I724

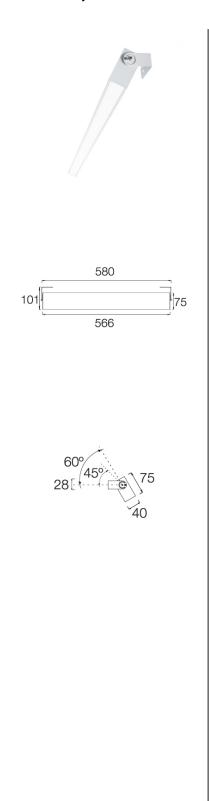

Linear projectors or uplights with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 566mm length and in a width of 40mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Opal extruded polycarbonate diffuser.

Highly efficient linear printed circuit board.

Built-in driver, included. Electronic options for lighting control: DALI-2.

Passive temperature management.

Wall mounted by adjustable mounting brackets.


Matching products:

TIRET 100 recessed.

TIRET 200 frameless recessed. TIRET 300 surface mounted. TIRET 400 and TIRET 500 pendant. TIRET 600 and TIRET 700 wall-mounted.

TIRET 800 projectors.

Luminaire luminous flux: 756lm Luminaire connected power: 7.1 W Luminaire efficiency: 106 lm/W Light source luminous flux: 1200lm Light source power: 6 W Constant Current: 150 mA CRI: 80 Colour Temperature: 3000K Chromaticity Tolerance: MacAdam 3 Beam Angle: 91° LOR: 63% Average Service Life: 5000h LED reliability: >72000h L80B10 UGR: <19 under the below indicated parameters



This product contains a light source of energy efficiency class $\,\mathrm{C}\,$

Electronic Equipment

Room dimensions X=4H/8H Reflectance 20% | 50% | 70% Luminaire spacing = 0.5m

S: On/Off (AC/DC) D: DALI-2/switchDIM/corridorFUNCTION B: Bluetooth-Casambi

Photobiological safety group: 1

*Add the suffix -S, -D, -B after the reference to indicate your electronic equipment choice.

Finishes

Cd/Klm: 443 lmax: 532 Cd

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 02.05.2024]

5 years guarantee **CE** BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

Ronda de la Font Grossa, 15

08540 Centelles | Barcelona

Contact T. +34 93 8

T. +34 93 881 35 12 ir T. +34 93 881 37 13 **v**

info@rovasi.com www.rovasi.com