
# MOVE 900 OPTIMAL DISPLAY



Track spots



### 911MOV.1-T1148

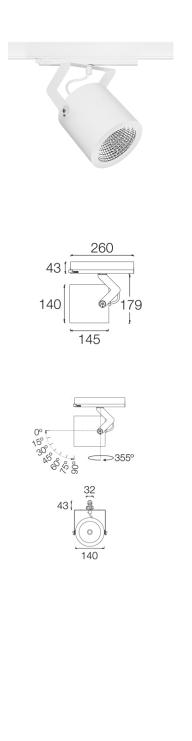

Track spots with symmetrical light distribution to achieve an effective task, accent or general lighting. Special LED module created to be the optimal solution for specific projects. Cylindrical design in diameter 140 mm.

Articulated arm adjustable 0°,15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request. Track adaptor available in white, black or grey.

max=10048 Cd

η=90.7% ▼M ▼Ø ▼LUX

0.22 10048

0.43 2512

0.65 1116

1

2

3

4 0.86 628

5 1.08 402

12°

Optional anti-glare accessories for more visual comfort.

Driver built into the track adaptor. Consult compatible tracks with the track adaptor.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Three-phase tracks are available as well as accessories to create a custom system.

#### Light source power: 11 W Fixture power: 12.61 W Constant Current: 350 mA Luminous flux of the light source: 1105lm Luminous flux of the fixture: 1006lm CRI: >90 Colour Temperature: GOLD+ Chromaticity Tolerance: MacAdam 4 Beam Angle: 12°

LOR: 91% Average Service Life: 50000h LED reliability: 50000h L90B50 Photobiological safety group: 1 Luminous efficacy: 80 lm/W This product contains a light source of energy efficiency class G

#### Electronic Equipment

S: On/Off D: DALI-2/DSI switchDIM/corridorFUNCTION B: Bluetooth-Casambi

\*Add the suffix -S, -D, -B after the reference to indicate your electronic equipment choice.

#### Finishes

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

#### Upgradeable, Replaceable, Repairable



#### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 20.04.2024]

## 5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

#### ROVASI S.L.

Spain

Pol. Ind. La Gavarra

08540 Centelles | Barcelona

Ronda de la Font Grossa, 15

#### Contact

T. +34 93 881 35 12 T. +34 93 881 37 13

info@rovasi.com www.rovasi.com