



101HEX.1-I2106



Pendant downlight with symmetrical light distribution to achieve an effective task or ambient lighting.

Luminaire luminous flux: 2508lm
Luminaire connected power: 24,2 W
Luminaire efficiency: 104 lm/W
Light source luminous flux: 3300lm
Light source power: 21,8 W
Constant Current: 700 mA
CRI: >90 R9 64
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 53°
LOR: 76%

LED reliability at nominal Ta = 25°C: 60.000h L90B10
UGR: C0° = 13,2 | C90° = 13 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0,25m

Photobiological safety group: 1

Cd/Klm: 944

This product contains a light source of energy efficiency class D


Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S, -D, -B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

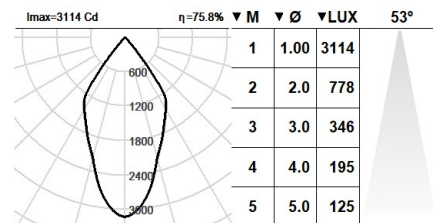

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.11.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com