


101LNT.1.01-I2131



Surface mounted fixtures with symmetrical light distribution. Wall fixtures with light emission on two sides. Cylindrical design in 265mm diameter.

Protection rating against dust and moisture: entire IP65.

Protection rating for resistance to harmful mechanical impacts: IK10.

Robust body made of die-cast aluminium and trim coated with polyester powder along with C4 treatment for corrosion resistance to guarantee further durability. Textured paint finish. Different RAL colour finishes available under request. C5-M special coating for highly corrosive environments is available under request.

Sandblasted metalized aluminium reflector.

Impact resistant cover made of clear polycarbonate (IK10).

Optional clear glass diffuser (IK05). Frosted or painted diffuser finishes under request.

Temperature resistant silicone rubber gasket.

Two IP67 venting valve to reduce condensation.

A4 stainless steel locking screw. Optional supply of A2 stainless steel vandal-resistant screws [reference 2 x F2.A0265 + F2.01].

Built-in driver, included. Ambient temperature: up to 50°C.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0,4.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management: heat dissipation flows through the fixture body itself.

Mounting to the wall through mounting plate with two fixing holes.

Two cable entry from the fixation plate.

Luminaire luminous flux: 2x1351lm

Luminaire connected power: 23,8 W

Luminaire efficiency: 57 lm/W

Light source luminous flux: 2x2145lm

Light source power: 2x10,66 W

Constant Current: 350 mA

CRI: >80

Colour Temperature: 4000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 102°

LOR: 63%

LED reliability at nominal Ta = 25°C: 100.000h L90B10

Photobiological safety group: 1

Cd/Klm: 295

This product contains a light source of energy efficiency class C

Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)

D: DALI-2/switchDIM/corridorFUNCTION


B: Bluetooth-Casambi [15m]

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White textured, **2:** RAL9005: Jet Black textured, **4:** RAL7016: Anthracite Grey textured, **7:** RAL9006: White Aluminium textured, **80 Corten**, **90:** RAL6005 Moss Green textured

Upgradeable, Replaceable, Repairable

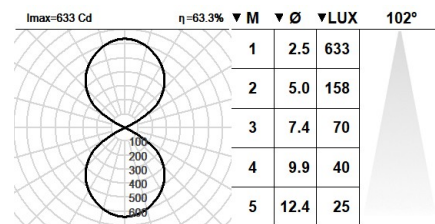

Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 14.12.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com