



104LTS.8.02-R1800



Recessed buried upright with symmetrical light distribution.  
Circular design in diameter: 120mm.  
IP67 protection rating that enables it to resist immersion to a depth of 1m.  
Protection rating of resistance to harmful mechanical impacts: IK10.  
Load supported: 6600 Kg. It can be driven over by vehicles with pneumatic tyres.  
Robust and corrosion-resistant black painted aluminium housing with C5-M special coating for environments with very high corrosivity. 316L stainless steel marine grade trim.  
Sandblasted metalized aluminium reflector.  
10 mm tempered protection frosted glass.  
Temperature resistant silicone rubber gasket.  
A4 stainless steel locking screw. Optional supply of A2 stainless steel vandal-resistant screws [reference F2.A0120 + F2.A1].  
Remote driver supplied.  
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.  
Passive temperature management: heat dissipation flows through the fixture body itself.  
Ground mounted by two fixing holes.  
Supplied with aluminium installation tube as standard. Installation tube for flush installation as accessory [reference M3.C0120].  
Pre-wiring of 0.5 metres cable 2x1,5mm<sup>2</sup>.  
IP68 connector to be ordered separately [reference F3.A3 (On/Off)].

**Luminaire luminous flux:** 279lm  
**Luminaire connected power:** 4,85 W  
**Luminaire efficiency:** 58 lm/W  
**Light source luminous flux:** 775lm  
**Light source power:** 4,37 W  
**Constant Current:** 140 mA  
**CRI:** >90 R9 62  
**Colour Temperature:** 2700K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 76°  
**LOR:** 36%  
**LED reliability at nominal Ta = 25°C:** 50.000h L90B10  
**Photobiological safety group:** 0  
**This product contains a light source of energy efficiency class D**

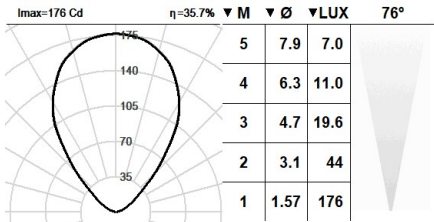

**Electronic Equipment**  
**S:** On/Off

\*Add the suffix **-S** after the reference to indicate your electronic equipment choice.

**Finishes**  
**8:** Stainless Steel 316L: Marine grade, **1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 14.09.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346  
BSI Cert ISO 14001:2015 - n°EMS 554685

**ROVASI S.L.**  
Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

**Contact**  
T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 www.rovasi.com