



MOVE 300

Surface-mounted spots



307MOV.1-I2129



Surface-mounted spots with symmetrical light distribution to achieve an effective task, accent or general lighting.

Cylindrical design in diameter 120mm.

Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.

Aluminium base for attachment to the ceiling supplied with the same finish as the light fixture.

Optional anti-glare accessories for more visual comfort.

Integral driver included.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0,4$.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Mounted to the ceiling by two fixing points.

Luminaire luminous flux: 1802lm

Luminaire connected power: 11,9 W

Luminaire efficiency: 151 lm/W

Light source luminous flux: 1980lm

Light source power: 10,66 W

Constant Current: 350 mA

CRI: >80

Colour Temperature: 2700K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 12°

LOR: 91%

LED reliability at nominal Ta = 25°C: 57000h L90B10 >60000h L90B50

UGR: $C0^\circ = 14$ | $C90^\circ = 14$ under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.25m

Photobiological safety group: 1

This product contains a light source of energy efficiency class D

Electronic Equipment

K: On/Off (basic)


S: On/Off (AC/DC, NOT looping through capable)

D: DALI-2/switchDIM/corridorFUNCTION


*Add the suffix **-K**, **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

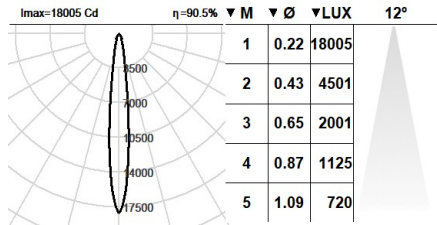

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 01.12.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 **www.rovasi.com**