



## 907MOV.1-T2208



Track spots with symmetrical light distribution to achieve an effective task, accent or general lighting. Cylindrical design in diameter 120mm.

Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.

Track adaptor available in white, black or grey.

Optional anti-glare accessories for more visual comfort.

Driver built into the track adaptor. Consult compatible tracks with the track adaptor.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0,4.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Three-phase tracks are available as well as accessories to create a custom system.

**Luminaire luminous flux:** 2120lm

**Luminaire connected power:** 17,1 W

**Luminaire efficiency:** 124 lm/W

**Light source luminous flux:** 2330lm

**Light source power:** 15,43 W

**Constant Current:** 500 mA

**CRI:** >90 R9 64

**Colour Temperature:** 3000K

**Chromaticity Tolerance:** MacAdam 3


**Beam Angle:** 12°

**LOR:** 91%

**LED reliability at nominal Ta = 25°C:** 57000h L90B10 >60000h L90B50

**Photobiological safety group:** 1

**This product contains a light source of energy efficiency class D**

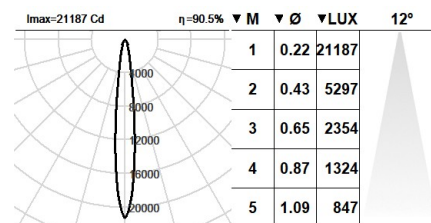

### Electronic Equipment

**S:** On/Off

**D:** DALI-2/switchDIM/corridorFUNCTION

**B:** Bluetooth-Casambi

\*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

### Finishes

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

### Upgradeable, Replaceable, Repairable



### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 12.12.2025]

### 5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

### ROVASI S.L.

Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarrà  
08540 Centelles | Barcelona  
Spain

### Contact

T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)