

111TOP.1.02-I1064



Pendant downlights with symmetrical light distribution to achieve an effective ambient lighting.
Circular design in 1100mm diameter.
Powder painted aluminium profile available in assorted finishes, customized RAL under request.
PMMA opal diffuser (thickness 3mm.)
Tridonic high energy efficiency printed circuit board.
Built-in driver included
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM \leq 1 and SVM \leq 0.4.
Electronic options for lighting control: DALI-2 (two DALI addresses).
3 hours battery available as option (change of size required).
Passive temperature management: heat dissipation flows through the fixture body itself.
Delivered with a short powder painted metal rod, custom made length up to 1000mm, minimum 300mm.
Mounted to the ceiling by cylindrical ceiling rose.
TOP can be combined with the LEDA surface-mounted fixtures and KUU and CANDRA recessed mounted lines to get an harmonious finish.

Luminaire luminous flux: 20186lm
Luminaire connected power: 129.14 W
Luminaire efficiency: 156 lm/W
Light source luminous flux: 22940lm
Light source power: 118 W
Constant Current: 550 mA
CRI: >80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 108°
LOR: 88%

LED reliability at nominal Ta = 25°C: L90B50>50000h

UGR: <19 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.45m

Photobiological safety group: 1

This product contains a light source of energy efficiency class C

Electronic Equipment

S: On/Off (AC/DC)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION

DE: DALI-2/switchDIM + 3h battery


DDE: DALI-2/switchDIM+ 3 hours battery (DALI)

B: Bluetooth-Casambi

*Add the suffix **-S**, **-SE**, **-D**, **-DE**, **-DDE**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

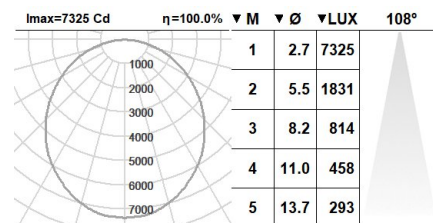

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 06.06.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com