



109TOP.1.02-I720



Pendant downlights with symmetrical light distribution to achieve an effective ambient lighting.
Circular design in 550mm diameter.
Powder painted aluminium profile available in assorted finishes, customized RAL under request.
PMMA opal diffuser (thickness 3mm.)
Tridonic high energy efficiency printed circuit board. Tunable White PCB: 2700K - 6500K
Built-in driver, included.

Electronic options for lighting control: SwitchDIM/ColourSwitch/DALI-2 or Bluetooth.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0,4$.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management: heat dissipation flows through the fixture body itself.

Delivered with a short powder painted metal rod. Standard rod length 300 mm, customizable up to 1000 mm. Mounted to the ceiling by cylindrical ceiling rose.

TOP can be combined with the LEDA surface-mounted fixtures and KUU and CANDRA recessed mounted lines to get an harmonious finish.

Luminaire luminous flux: 3470lm
Luminaire connected power: 29,9 W
Luminaire efficiency: 116 lm/W
Light source luminous flux: 4650lm
Light source power: 28 W
Constant Current: 125 mA
CRI: >90
Colour Temperature: 2700K-6500K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 102°

LED reliability at nominal Ta = 25°C: 50.000h L90B50

Photobiological safety group: 1

This product contains a light source of energy efficiency class D


Electronic Equipment

T: Tunable White DALI-2/switchDIM/ColourSwitch


*Add the suffix **-T** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

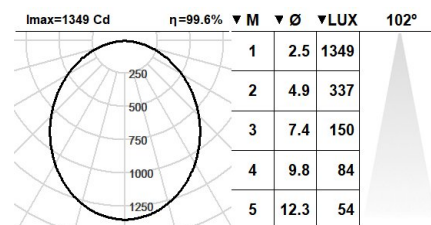

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 08.12.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com