


## 365KBR.22-I1235

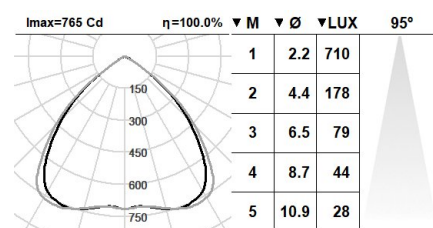

Surface mounted linear downlights with symmetrical light distribution to achieve an effective task or general lighting.  
 Linear fixture in 1124mm length and in a width of 50mm.  
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.  
 Modular optics in 28 cells in black finish designed to ensure visual comfort.  
 Blind covers available with a length of 280mm or its multiples: accessory reference M5.Y.  
 Highly efficient linear printed circuit board.  
 Built-in driver, included.  
 Electronic options for lighting control: DALI-2.  
 The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits:  $PstLM \leq 1$  and  $SVM \leq 0.4$ .  
 Passive temperature management.  
 Ceiling-mounted using cleats. It is possible to combine different lengths and junction modules in different ways to create customized design.

**Luminaire luminous flux:** 1733lm  
**Luminaire connected power:** 14.54 W  
**Luminaire efficiency:** 119 lm/W  
**Light source luminous flux:** 2140lm  
**Light source power:** 11.2 W  
**Constant Current:** 150 mA  
**CRI:** 80  
**Colour Temperature:** 3000K  
**Chromaticity Tolerance:** MacAdam3  
**Beam Angle:** 96°  
**LOR:** 81%  
**Average Service Life:** 50000h  
**LED reliability:** >90.000h L80B10  
**UGR:** <19  
**Photobiological safety group:** 1  
**This product contains a light source of energy efficiency class C**

**Electronic Equipment**

**S:** On/Off (AC/DC)  
**SE:** On/Off (AC/DC) + Battery 3h  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**DE:** DALI-2/switchDIM+ 3 hours battery  
**DDE:** DALI-2/switchDIM+ 3 hours battery (DALI)  
**B:** Bluetooth-Casambi

\*Add the suffix **-S, -SE, -D, -DE, -DDE, -B** after the reference to indicate your electronic equipment choice.

**Finishes**

**22:** Black frame - Black reflector

**Upgradeable, Replaceable, Repairable****Note**

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 09.05.2025]

**5 years guarantee**

BSI Cert ISO 9001:2015 - n°FM 39346  
 BSI Cert ISO 14001:2015 - n°EMS 554685

**ROVASI S.L.**

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarra  
 08540 Centelles | Barcelona  
 Spain

**Contact**

T. +34 93 881 35 12 info@rovasi.com  
 T. +34 93 881 37 13 www.rovasi.com