

450KBR.14-I1207



Pendant linear downlights with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 284mm length and in a width of 50mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Metallised modular optics in 7 cells in silvered finish in silvered finish designed to ensure visual comfort.

Blind covers available with a length of 280mm or its multiples: accessory reference M5.Y.

Highly efficient linear printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2 or Bluetooth.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits:  $PstLM \leq 1$  and  $SVM \leq 0.4$ .

Passive temperature management.

Ceiling-mounted with adjustable steel wire suspension ( 1 m ) and transparent electrical wire. Different suspension length on request.It is possible to combine different lengths and junction modules in different ways to create customized design.

**Luminaire luminous flux:** 682lm

**Luminaire connected power:** 5,34 W

**Luminaire efficiency:** 128 lm/W

**Light source luminous flux:** 710lm

**Light source power:** 3,7 W

**Constant Current:** 200 mA

**CRI:** 80

**Colour Temperature:** 3000K

**Chromaticity Tolerance:** MacAdam3


**Beam Angle:** 76°

**LOR:** 96%

**LED reliability at nominal Ta = 25°C:** 90.000h L80B10

**Photobiological safety group:** 1

**This product contains a light source of energy efficiency class C**

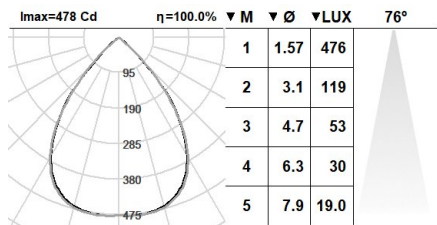

**Electronic Equipment**

**S:** On/Off

**D:** DALI-2/switchDIM



**B:** Bluetooth-Casambi

\*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

**Finishes**

**14:** White frame - Silver reflector

**Upgradeable, Replaceable, Repairable**



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 09.09.2025]

**5 years guarantee**



BSI Cert ISO 9001:2015 - n°FM 39346  
BSI Cert ISO 14001:2015 - n°EMS 554685

**ROVASI S.L.**

Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

**Contact**

T. +34 93 881 35 12    info@rovasi.com  
T. +34 93 881 37 13    www.rovasi.com