

950KBR.11-I1207



Linear downlights with 3-phase track adapter with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 284mm length and in a width of 50mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.

White finish modular optics in 7 cells designed to ensure visual comfort.

Blind covers available with a length of 280mm or its multiples: accessory reference M5.Y.

Highly efficient linear printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4 .

Passive temperature management.

Three-phase tracks are available as well as accessories to create a custom system.

Luminaire luminous flux: 696lm

Luminaire connected power: 5,34 W

Luminaire efficiency: 130 lm/W

Light source luminous flux: 710lm

Light source power: 3,7 W

Constant Current: 200 mA

CRI: 80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam3

Beam Angle: 78°


LOR: 98%

LED reliability at nominal Ta = 25°C: 90.000h L80B10

UGR: <18

Photobiological safety group: 1

This product contains a light source of energy efficiency class C

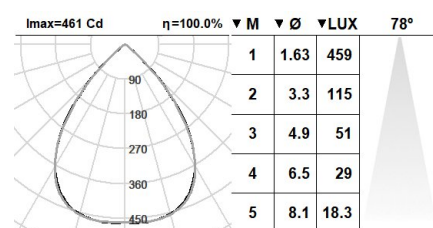

Electronic Equipment

S: On/Off

D: DALI-2/switchDIM

B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

11: White frame - white reflector

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 17.07.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com

www.rovasi.com