



108PLC.1.02-I2802



Pendant downlights with symmetrical light distribution to achieve an effective ambient lighting.
Circular design available in 350mm diameter.
Powder painted one piece aluminium profile available in assorted finishes, customized RAL under request.
PMMA opal diffuser (thickness 3mm.).
High energy efficiency printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI-2 or Bluetooth.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.
Passive temperature management: heat dissipation flows through the fixture body itself.
Ceiling-mounted using ceiling rose. Suspended 1 meter by four steel cords. Transparent electronic wire.
PLACE can be combined with KUU and CANDRA recessed downlights and LEDA surface-mounted downlights to get a harmonious finish.

Luminaire luminous flux: 3180lm
Luminaire connected power: 23,6 W
Luminaire efficiency: 135 lm/W
Light source luminous flux: 3655lm
Light source power: 21,3 W
Constant Current: 600 mA
CRI: >80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 114°
LOR: 87%
LED reliability at nominal Ta = 25°C: 72.000h L80B10
Photobiological safety group: 1
This product contains a light source of energy efficiency class C

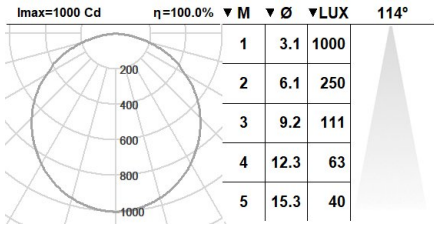

Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S, -D, -B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 08.09.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com