



109TOP.1.02-l2808



Pendant downlights with symmetrical light distribution to achieve an effective ambient lighting.
Circular design in 553mm diameter.

Powder painted aluminium profile available in assorted finishes, customized RAL under request.

PMMA opal diffuser (thickness 3mm.)

Tridonic high energy efficiency printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4 .

3 hours battery available as option (change of size required).

Passive temperature management: heat dissipation flows through the fixture body itself.

Delivered with a short powder painted metal rod, custom made length up to 1000mm, minimum 300mm.

Mounted to the ceiling by cylindrical ceiling rose.

TOP can be combined with the LEDA surface-mounted fixtures and KUU and CANDRA recessed mounted lines to get an harmonious finish.

Luminaire luminous flux: 5026lm
Luminaire connected power: 32,38 W
Luminaire efficiency: 155 lm/W
Light source luminous flux: 5777lm
Light source power: 29,14 W
Constant Current: 250 mA
CRI: >80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 106°
LOR: 87%

LED reliability at nominal Ta = 25°C: 100.000h L80B10

Photobiological safety group: 1

This product contains a light source of energy efficiency class B

Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION

DE: DALI-2/switchDIM + 3h battery


DDE: DALI-2/switchDIM+ 3 hours battery (DALI)

B: Bluetooth-Casambi

*Add the suffix **-S**, **-SE**, **-D**, **-DE**, **-DDE**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

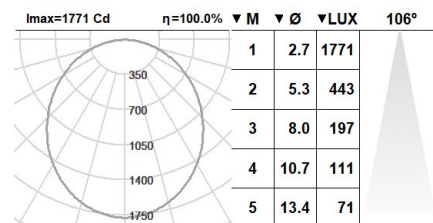

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 27.07.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarrà
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com