




140KER.1-I1867



Pendant downlights with symmetrical light distribution to achieve an effective task or general lighting.
Neutral cylindrical body in diameter 60mm.
Sandblasted metalized aluminium reflector silver finished.
Powder painted aluminium profile available in assorted finishes, customized RAL under request.
Built-in driver, included.
Electronic options for lighting control: DALI-2.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0.4$.
Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture body itself.
Delivered with 1 meter steel cord as standard. Transparent electronic wire. Mounted to the ceiling by cylindrical ceiling rose.
For a more dynamic result, it can be supplied with an adapter for three-phase track [reference M3.A].
KERI can be combined with the GOTA surface mounted downlights line fixtures to get a harmonious finish.

Luminaire luminous flux: 589lm
Luminaire connected power: 5,15 W
Luminaire efficiency: 114 lm/W
Light source luminous flux: 785lm
Light source power: 4,64 W
Constant Current: 150 mA
CRI: >90 R9 72
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 35°
LOR: 75%
LED reliability at nominal Ta = 25°C: 60.000h L90B10
Photobiological safety group: 1
This product contains a light source of energy efficiency class D

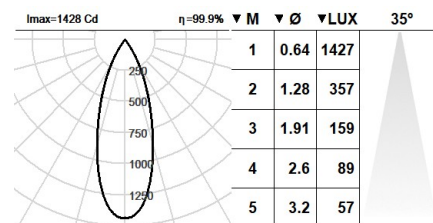

Electronic Equipment



S: On/Off (AC/DC)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White textured, **2:** RAL9005: Jet Black textured, **4:** RAL7016: Anthracite Grey textured, **7:** RAL9006: White Aluminium textured

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 07.07.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com