


850RNA.1-I2434



Linear projectors with symmetrical light distribution to achieve an effective task or general lighting.
 Linear fixture in 290mm length and in a width of 55mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 Opal polycarbonate diffuser.
 Highly efficient linear printed circuit board.
 Built-in driver, included.
 Electronic options for lighting control: DALI-2.
 The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM \leq 1 and SVM \leq 0.4.
 Passive temperature management.
 Ceiling or wall installation with adjustable fixing brackets.

Luminaire luminous flux: 324lm
Luminaire connected power: 5,7 W
Luminaire efficiency: 57 lm/W
Light source luminous flux: 540lm
Light source power: 3,2 W
Constant Current: 150 mA
CRI: >90 R9 54
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 103°
LOR: 60%
LED reliability at nominal Ta = 25°C: 100.000h L80B10
Photobiological safety group: 0
This product contains a light source of energy efficiency class D

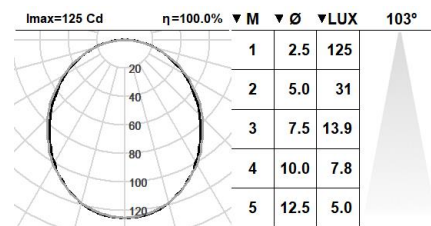

Electronic Equipment


S: On/Off
D: DALI-2/switchDIM
B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 23.05.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com