



920HRN.1-I1603



Linear downlights with three-phase track adapter. Symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 295mm length and in a width of 50mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.

Range of PMMA optics to achieve specific photometric results.

Highly efficient linear printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0.4$.

Passive temperature management.

Three-phase tracks are available as well as accessories to create a custom system.

Luminaire luminous flux: 1217lm

Luminaire connected power: 10,1 W

Luminaire efficiency: 120 lm/W

Light source luminous flux: 1255lm

Light source power: 6,9 W

Constant Current: 500 mA

CRI: 80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam 3


Beam Angle: 31°

LOR: 97%

LED reliability at nominal Ta = 25°C: 54.000h L80B10

Photobiological safety group: 1

This product contains a light source of energy efficiency class C

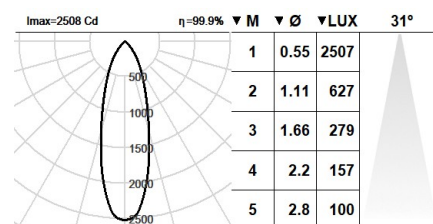

Electronic Equipment

S: On/Off

D: DALI-2/switchDIM

B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 16.08.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com

www.rovasi.com