



QUADRATIC SHALLOW

Recessed downlights

ROVASI
Positive Lighting



101QSH.1-R882



Recessed ceiling-mounted downlights with symmetrical light distribution to achieve an effective task or general lighting.

Square design available in 225mm x 225mm.

Remarkable low height: 89mm.

Protection rating against dust and moisture: IP54 from underneath.

High-purity matt anodised aluminium reflector.

Powder painted die-cast aluminium trim available in assorted finishes, customized RAL under request.

Sandblasted flush glass diffuser.

Remote driver included.


Electronic options for lighting control: DALI-2.

3 hours battery available as option (class I).

Passive temperature management: heat dissipation through heat sink diffuser.

Ceiling-mounted using galvanised steel support with spring clamps.

Luminaire luminous flux: 2761lm
Luminaire connected power: 25.33 W
Luminaire efficiency: 109 lm/W
Light source luminous flux: 4060lm
Light source power: 23 W
Constant Current: 700 mA
CRI: >80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 86°
LOR: 68%
Average Service Life: 50000h
LED reliability: 50000h L90B10
UGR: >22
Photobiological safety group: 1
Cd/Klm: 487
Imax: 1345 Cd
This product contains a light source of energy efficiency class D

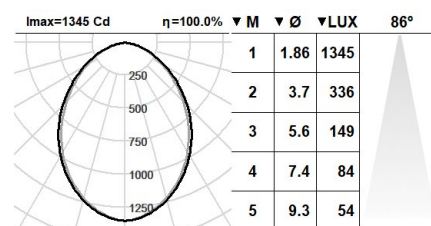

Electronic Equipment

K: On/Off (basic)
S: On/Off (AC/DC + looping through)
SE: On/Off (AC/DC+looping) + 3h battery
D: DALI-2/switchDIM/corridorFUNCTION
DE: DALI-2/switchDIM/corridorFUNCTION + Battery 3h
B: Bluetooth-Casambi

*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 06.05.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarrà
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 **www.rovasi.com**