


RAINA 400

IP20 Pendant linear downlights



451RNA.1-I736

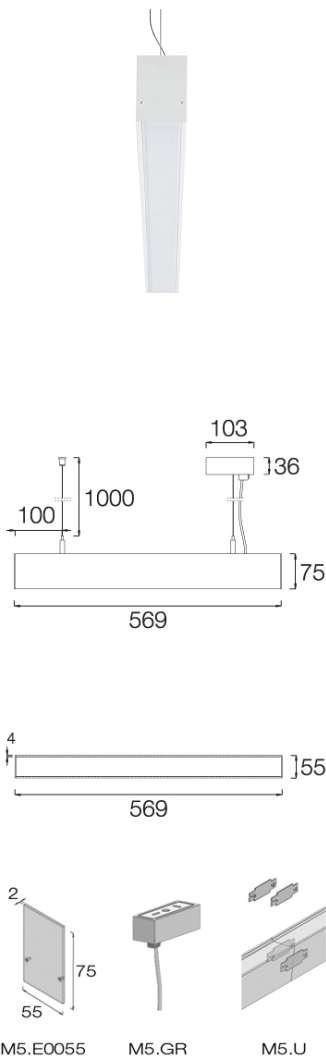

IP20

650°



Pendant linear fixtures with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 569mm length and in a width of 55mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Opal polycarbonate diffuser.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI-2.
Passive temperature management.
Ceiling-mounted with adjustable steel wire suspension (1 m) and transparent electrical wire. Different suspension length on request.
End caps must be ordered separately, reference M5.E0055.
Ceiling rose and electrical wire must be ordered separately, reference M5.GR3 [on/off] o M5.GR5 [DALI].
It is possible to combine different lengths to create customized design. The connection accessory must be ordered separately, reference M5.U.

Luminaire luminous flux: 1057lm
Luminaire connected power: 12.08 W
Luminaire efficiency: 88 lm/W
Light source luminous flux: 1760lm
Light source power: 11 W
Constant Current: 250 mA
CRI: 90
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 103°
LOR: 60%

Average Service Life: 50000h
LED reliability: >60000h L80B10
UGR: <19 under the below indicated parameters
Room dimensions X=4/H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.45m

Photobiological safety group: 1

This product contains a light source of energy efficiency class D


Electronic Equipment

S: On/Off
D: DALI-2/switchDIM/corridorFUNCTION



*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

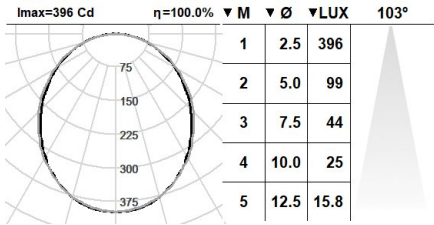

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 01.05.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 **www.rovasi.com**