


655TRT.1-I616



Wall mounted linear downlights with symmetrical light distribution to achieve an effective task or general lighting.  
Linear fixture in 1126mm length and in a width of 40mm.  
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.  
Opal extruded polycarbonate diffuser.  
Highly efficient linear printed circuit board.  
Accessories available to create customized linear systems.  
Built-in driver, included. Tunable White: 2700K - 6500K.  
Electronic options for lighting control: DALI-2.  
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits:  $PstLM \leq 1$  and  $SVM \leq 0.4$ .  
3 hours battery available as option.  
Passive temperature management.  
Wall mounted by mounting brackets.

**Luminaire luminous flux:** 3480lm  
**Luminaire connected power:** 48.1 W  
**Light source luminous flux:** 6000lm  
**Light source power:** 48.1 W  
**CRI:** >90  
**Colour Temperature:** 2700K - 6500K  
**Beam Angle:** 84°  
**Average Service Life:** 50000h  
**Photobiological safety group:** 1  
**This product contains a light source of energy efficiency class F**

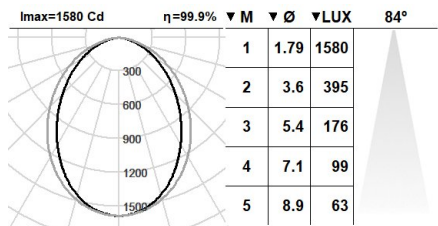

**Electronic Equipment**

**T:** DALI-2/switchDIM/ColourSwitch

\*Add the suffix **-T** after the reference to indicate your electronic equipment choice.

**Finishes**

**2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

**Upgradeable, Replaceable, Repairable**



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 21.05.2024]

**5 years guarantee**



BSI Cert ISO 9001:2015 - n°FM 39346  
BSI Cert ISO 14001:2015 - n°EMS 554685

**ROVASI S.L.**

Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

**Contact**

T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)