

101BSE.1.01-R633



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent.

3 hours battery available as option.

Passive temperature management: heat dissipation flows through an aluminium heat sink.

Ceiling-mounted by spring clamps for easy installation, ceiling thickness up to 25mm.

Luminaire luminous flux: 600lm

Luminaire connected power: 7.69 W

Luminaire efficiency: 78 lm/W

Light source luminous flux: 600lm

Light source power: 6.6 W

Constant Current: 200 mA

CRI: >90

Colour Temperature: 2700K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 36°

LOR: 100%

Average Service Life: 50000h

LED reliability: >50000h L70B50

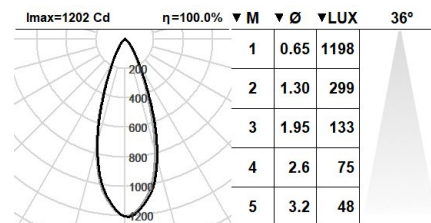
UGR: <16

Photobiological safety group: 1

Cd/Klm: 2004

Imax: 1202 Cd

This product contains a light source of energy efficiency class G

**Electronic Equipment**

K: On/Off (basic)

S: On/Off (AC/DC)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION

DE: DALI-2/switchDIM + 3h battery

B: Bluetooth-Casambi

*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable

Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 05.05.2024]

5 years guarantee

BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com

www.rovasi.com