

114MOV.1-R684



Recessed spots with symmetrical light distribution to achieve an effective task, accent or general lighting. Special LED module created to be the optimal solution for specific projects.

Cylindrical design in diameter 140 mm.

Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.

Die-cast aluminium recessed base supplied with the same finish as the light fixture.

Optional anti-glare accessories for more visual comfort.

Remote driver included.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Mounted to the ceiling by two fixing points.

Luminaire luminous flux: 1502lm

Luminaire connected power: 18,33 W

Luminaire efficiency: 82 lm/W

Light source luminous flux: 2030lm

Light source power: 17 W

Constant Current: 500 mA

CRI: >90

Colour Temperature: GOLD

Chromaticity Tolerance: MacAdam 3

Beam Angle: 50°

LOR: 74%

LED reliability at nominal Ta = 25°C: 50000h L90B50

UGR: <19

Photobiological safety group: 1

This product contains a light source of energy efficiency class E

Electronic Equipment

K: On/Off (basic)

S: On/Off (AC/DC)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION


DE: DALI-2/switchDIM + 3h battery

B: Bluetooth-Casambi

*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

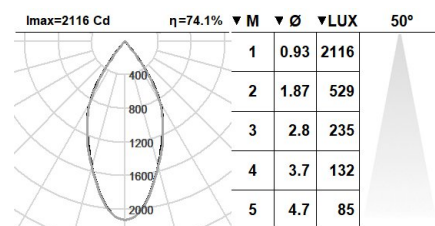

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 02.07.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com