

MOVE 300 OPTIMAL DISPLAY

Surface-mounted spots

ROVASI
Positive Lighting



307MOV.1-I690



Surface-mounted spots with symmetrical light distribution to achieve an effective task, accent or general lighting.

Special LED module created to be the optimal solution for specific projects.

Cylindrical design in diameter 120mm.

Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.

Aluminium base for attachment to the ceiling supplied with the same finish as the light fixture.

Optional anti-glare accessories for more visual comfort.

Integral driver included.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Mounted to the ceiling by two fixing points.

Luminaire luminous flux: 1219lm

Luminaire connected power: 18,33 W

Luminaire efficiency: 67 lm/W

Light source luminous flux: 1340lm

Light source power: 17 W

Constant Current: 500 mA

Colour Temperature: FRESH MEAT

Chromaticity Tolerance: MacAdam 4

Beam Angle: 12°

LOR: 91%

Average Service Life: 50000h

LED reliability: 50000h L90B50

UGR: <16

Photobiological safety group: 1

Electronic Equipment

K: On/Off (basic)


S: On/Off (AC/DC)

D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix **-K**, **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

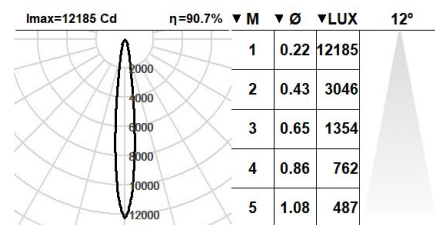

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 18.05.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com

www.rovasi.com