
MOVE 300 Surface-mounted spots





311MOV.1-1870

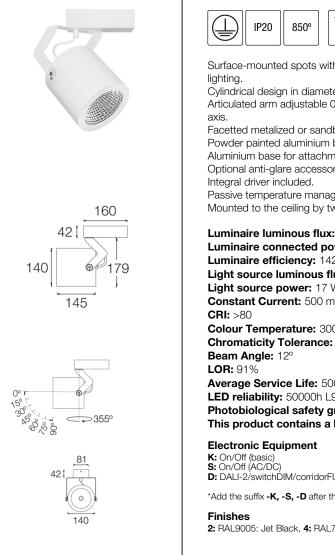

Surface-mounted spots with symmetrical light distribution to achieve an effective task, accent or general

Cylindrical design in diameter 140 mm.


Articulated arm adjustable 0°,15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request. Aluminium base for attachment to the ceiling supplied with the same finish as the light fixture. Optional anti-glare accessories for more visual comfort.

Passive temperature management: heat dissipation flows through aluminium heat sink. Mounted to the ceiling by two fixing points.

Luminaire luminous flux: 2612lm Luminaire connected power: 18.33 W Luminaire efficiency: 142 lm/W Light source luminous flux: 2870lm Light source power: 17 W Constant Current: 500 mA Colour Temperature: 3000K Chromaticity Tolerance: MacAdam 3 Average Service Life: 50000h LED reliability: 50000h L90B10 Photobiological safety group: 1 This product contains a light source of energy efficiency class D



D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix -K, -S, -D after the reference to indicate your electronic equipment choice.

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 07.05.2024]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

08540 Centelles | Barcelona

Contact Ronda de la Font Grossa, 15

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com