


# MOVE 300

## Surface-mounted spots

**ROVASI**  
Positive Lighting



### 311MOV.1-I881



Surface-mounted spots with symmetrical light distribution to achieve an effective task, accent or general lighting.

Cylindrical design in diameter 140 mm.

Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.

Aluminium base for attachment to the ceiling supplied with the same finish as the light fixture.

Optional anti-glare accessories for more visual comfort.

Integral driver included.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0,4.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Mounted to the ceiling by two fixing points.

**Luminaire luminous flux:** 3549lm

**Luminaire connected power:** 25.33 W

**Luminaire efficiency:** 140 lm/W

**Light source luminous flux:** 3900lm

**Light source power:** 23 W

**Constant Current:** 700 mA

**CRI:** >80

**Colour Temperature:** 2700K

**Chromaticity Tolerance:** MacAdam 3

**Beam Angle:** 12°

**LOR:** 91%

**LED reliability at nominal Ta = 25°C:** 50000h L90B10

**Photobiological safety group:** 1

**This product contains a light source of energy efficiency class D**

#### Electronic Equipment

**K:** On/Off (basic)


**S:** On/Off (AC/DC, NOT looping through capable)

**D:** DALI-2/switchDIM/corridorFUNCTION

\*Add the suffix **-K**, **-S**, **-D** after the reference to indicate your electronic equipment choice.

#### Finishes

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

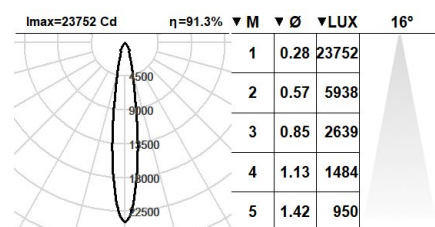

#### Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 16.12.2025]

**5 years guarantee**



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

#### ROVASI S.L.

Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

#### Contact

T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 **www.rovasi.com**