


NUCLEONS OPTIMAL DISPLAY

Small recessed downlights

ROVASI
Positive Lighting



107NCL.1-R1149



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent or ambient lighting.

Circular design in diameter 110mm.

Metalized aluminium reflector in assorted finishes: specular or sandblasted depending on the beam angle outcome.

Powder painted die-cast aluminium trim available in assorted finishes, customized RAL under request.

Accessory available to increase the protection rating to IP44 from underneath [reference M2.A0110].

Remote driver supplied. LED module for special applications.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Ceiling-mounted by spring clamps for easy installation, ceiling thickness up to 25mm.

Luminaire luminous flux: 922lm

Luminaire connected power: 12.61 W

Light source luminous flux: 1060lm

Light source power: 11 W

Constant Current: 350 mA

CRI: >90

Colour Temperature: FRESH MEAT

Chromaticity Tolerance: MacAdam 4

Beam Angle: 21°

LOR: 87%


Average Service Life: 50000h

LED reliability: 51000h L80B10

UGR: <16

Photobiological safety group: 1

Cd/Klm: 4042

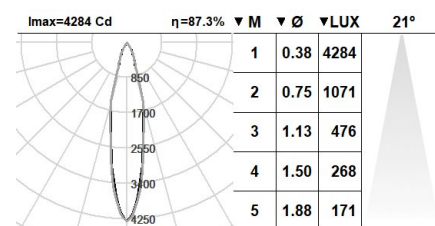

Electronic Equipment

K: On/Off (basic)

S: On/Off (AC/DC + looping through)

SE: On/Off (AC/DC+looping) + 3h battery

D: DALI-2/switchDIM/corridorFUNCTION

DE: DALI-2/switchDIM/corridorFUNCTION + Battery 3h

B: Bluetooth-Casambi

*Add the suffix **-K**, **-S**, **-SE**, **-D**, **-DE**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 30.04.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com