



## 101SMM.1-I868



Pendant downlight with symmetrical light distribution to achieve an effective task or ambient lighting. Facetted metallized aluminium reflector to control and direct the light.

Powder painted aluminium body available in assorted finishes, customized RAL under request.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture body itself.

Delivered with 1 meter steel cord suspension as standard and Transparent electronic wire. Mounted to the ceiling by cylindrical ceiling rose.

For a more dynamic result, it can be supplied with an adapter for three-phase track [reference M3.B].

**Luminaire luminous flux:** 1652lm  
**Luminaire connected power:** 12.61 W  
**Luminaire efficiency:** 131 lm/W  
**Light source luminous flux:** 1815lm  
**Light source power:** 11 W  
**Constant Current:** 350 mA  
**CRI:** >90  
**Colour Temperature:** 4000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 12°  
**LOR:** 91%  
**Average Service Life:** 50000h  
**LED reliability:** 50000h L90B10  
**UGR:** <16  
**Photobiological safety group:** 1  
**Cd/Klm:** 9093  
**Imax:** 16504 Cd

**This product contains a light source of energy efficiency class E**

### Electronic Equipment


**S:** On/Off

**D:** DALI-2/switchDIM/corridorFUNCTION


\*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

### Finishes

**2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

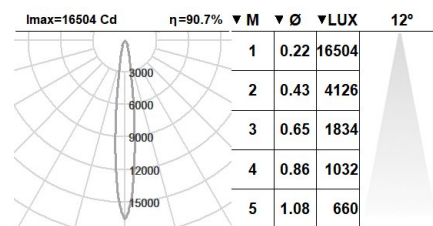

### Upgradeable, Replaceable, Repairable

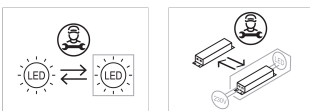

### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 05.05.2024]

### 5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346  
 BSI Cert ISO 14001:2015 - n°EMS 554685

### ROVASI S.L.

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarra  
 08540 Centelles | Barcelona  
 Spain

### Contact

T. +34 93 881 35 12 info@rovasi.com  
 T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)