

102KSS.1-I869



Surface-mounted downlight with symmetrical light distribution to achieve an effective task or ambient lighting.

Facetted metallized aluminium reflector to control and direct the light.

Powder painted aluminium body available in assorted finishes, customized RAL under request.

Built-in driver, included.


Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0.4$.

Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture body itself.

Mounting to the ceiling plate with three securing holes. Cable entry from the top of the luminaire.

Luminaire luminous flux: 2507lm
Luminaire connected power: 18.33 W
Luminaire efficiency: 137 lm/W
Light source luminous flux: 2755lm
Light source power: 17 W
Constant Current: 500 mA
CRI: >80
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 24°
LOR: 91%
Average Service Life: 50000h
LED reliability: 50000h L90B10
UGR: <16
Photobiological safety group: 1
Cd/Klm: 3580
Imax: 9863 Cd
This product contains a light source of energy efficiency class D

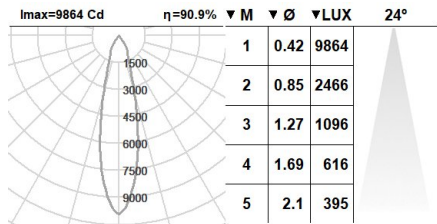

Electronic Equipment

S: On/Off


D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.05.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com