


150KBR.11-I1209



Recessed ceiling mounted linear downlights with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 310mm length and in a width of 70mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
White finish modular optics in 7 cells designed to ensure visual comfort.
Blind covers available with a length of 280mm or its multiples: accessory reference M5.Y.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI-2.
Passive temperature management.
Ceiling-mounted using steel support with screws. It is possible to combine different lengths and junction modules in different ways to create customized design.

Light source power: 4.7 W

Luminaire connected power: 6.7 W

Constant Current: 250 mA

Light source luminous flux: 885lm

Luminaire luminous flux: 867lm

CRI: 80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam3

Beam Angle: 78°

LOR: 98%

Average Service Life: 50000h

LED reliability: >90.000h L80B10

UGR: <19

Photobiological safety group: 1

Luminaire efficiency: 129 lm/W

This product contains a light source of energy efficiency class C

Electronic Equipment


S: On/Off

D: DALI-2/switchDIM/corridorFUNCTION



*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

11: White frame - white reflector

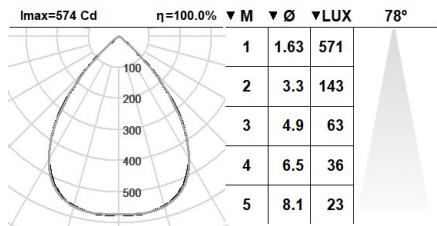

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 27.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com