



101SPS.1.01-R872



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent or ambient lighting.
Circular design in diameter 190mm.
Protection rating against dust and moisture: complete IP54.
Sandblasted metalized aluminium reflector.
Powder painted die-cast aluminium trim available in assorted finishes, customized RAL under request.
Tempered protection glass clear as standard, other finishes under request.
Remote driver supplied.
Electronic options for lighting control: DALI/DSI.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Ceiling-mounted by three fixing points.

Light source power: 17 W
Fixture power: 18.33 W
Constant Current: 500 mA
Luminous flux of the light source: 2280lm
Luminous flux of the fixture: 1710lm
CRI: >90
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 77°
LOR: 75%
Average Service Life: 50000h
LED reliability: 50000h L90B10
UGR: <19 under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.3m
Photobiological safety group: 1
Cd/Klm: 591
Luminous efficacy: 93 lm/W
Imax: 1347 Cd
This product contains a light source of energy efficiency class E

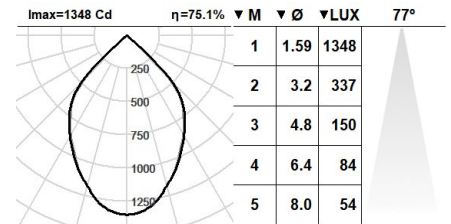


Electronic Equipment

S: On/Off (AC/DC)
K: On/Off (basic)
D: DALI-2/DSI/switchDIM/corridorFUNCTION
SE: On/Off (AC/DC) + 3 hours battery
DE: DALI-2/DSI/switchDIM/corridorFUNCTION + 3 hours battery
There are accessories available for dimming devices.
*Add the suffix **-S, -K, -D, -SE, -DE** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com