

101HEX.1-I863



Pendant downlight with symmetrical light distribution to achieve an effective task or ambient lighting.

Light source power: 11 W
Fixture power: 12.61 W
Constant Current: 350 mA
Luminous flux of the light source: 1960lm
Luminous flux of the fixture: 1686lm
CRI: >80
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 49°
LOR: 86%
Average Service Life: 50000h
LED reliability: 50000h L90B10
UGR: <16
Photobiological safety group: 1
Cd/Klm: 1101
Luminous efficacy: 134 lm/W
Imax: 2158 Cd

This product contains a light source of energy efficiency class D


Electronic Equipment

S: On/Off
D: DALI-2/DSI switchDIM/corridorFUNCTION

*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

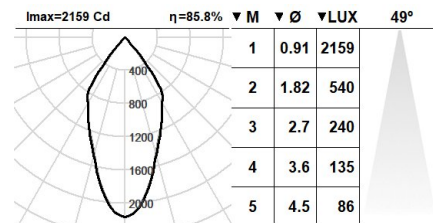

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com