



102QID.1-R900



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task or ambient lighting.

Circular design in diameter 150mm.

Sandblasted metalized aluminium reflector.

Powder painted die-cast aluminium trim available in assorted finishes.

Glass accessory available to increase the protection rating to IP54 from underneath [reference M2.K0150].

Remote driver supplied. Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Ceiling-mounted using galvanised steel support with spring clamps.

**Luminaire luminous flux:** 3886lm  
**Luminaire connected power:** 38.97 W  
**Luminaire efficiency:** 100 lm/W  
**Light source luminous flux:** 5715lm  
**Light source power:** 37 W  
**Constant Current:** 1050 mA  
**CRI:** >80  
**Colour Temperature:** 3000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 50°  
**LOR:** 68%

**Average Service Life:** 50000h  
**LED reliability:** 50000h L90B10  
**UGR:** <19 under the below indicated parameters  
 Room dimensions X=4H/8H  
 Reflectance 20% | 50% | 70%  
 Luminaire spacing = 0.3m  
**Photobiological safety group:** 1  
**Cd/Klm:** 1042  
**Imax:** 5955 Cd

**This product contains a light source of energy efficiency class D**


**Electronic Equipment**

**K:** On/Off (basic)  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**B:** Bluetooth-Casambi


\*Add the suffix **-K, -D, -B** after the reference to indicate your electronic equipment choice.

**Finishes**

**2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

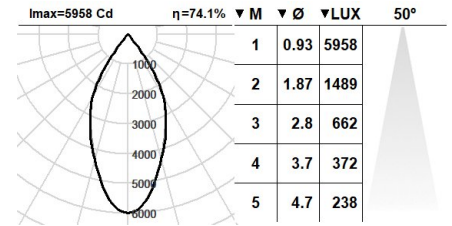

**Upgradeable, Replaceable, Repairable**



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 21.09.2024]

**5 years guarantee**



BSI Cert ISO 9001:2015 - n°FM 39346  
 BSI Cert ISO 14001:2015 - n°EMS 554685

**ROVASI S.L.**

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarra  
 08540 Centelles | Barcelona  
 Spain

**Contact**

T. +34 93 881 35 12 info@rovasi.com  
 T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)