

M5.E0055

M5.GR

M5.U

451RNA.1-I733



Pendant linear fixtures with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 569mm length and in a width of 55mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Opal polycarbonate diffuser.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI/DSI.
Passive temperature management.
Ceiling-mounted with adjustable steel wire suspension (1 m) and transparent electrical wire. Different suspension length on request.
End caps must be ordered separately, reference M5.E0055.
Ceiling rose and electrical wire must be ordered separately, reference M5.GR3 [on/off] o M5.GR5 [DALI].
It is possible to combine different lengths to create customized design. The connection accessory must be ordered separately, reference M5.U.

Light source power: 11 W

Fixture power: 12.08 W

Constant Current: 250 mA

Luminous flux of the light source: 2050lm

Luminous flux of the fixture: 1229lm

CRI: 80

Colour Temperature: 5000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 103°

LOR: 60%

Average Service Life: 50000h

LED reliability: >60000h L80B10

UGR: 19 under the below indicated parameters

Room dimensions X=4H/8H


Reflectance 20% | 50% | 70%

Luminaire spacing = 0.45m

Photobiological safety group: 1

Luminous efficacy: 102 lm/W

This product contains a light source of energy efficiency class C

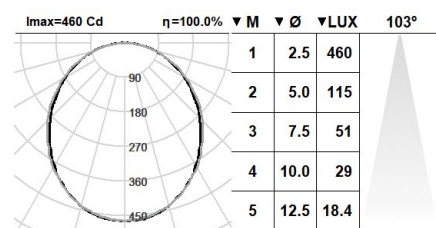

Electronic Equipment

S: On/Off

D: DALI-2/DSI/switchDIM


There are accessories available for dimming devices.

*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com