



851RNA.1-I729



IP40

650°



Linear projectors with symmetrical light distribution to achieve an effective task or general lighting.
Linear fixture in 569mm length and in a width of 55mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
Opal polycarbonate diffuser.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI/DSI.
Passive temperature management.
Ceiling or wall installation with adjustable fixing brackets.

Light source power: 6 W

Fixture power: 7.1 W

Constant Current: 150 mA

Luminous flux of the light source: 1080lm

Luminous flux of the fixture: 573lm

CRI: 90

Colour Temperature: 4000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 103°

LOR: 60%

Average Service Life: 50000h

LED reliability: >60000h L80B10

UGR: <19 under the below indicated parameters

Room dimensions X=4H/8H


Reflectance 20% | 50% | 70%

Luminaire spacing = 0.35m

Photobiological safety group: 1

Luminous efficacy: 81 lm/W

This product contains a light source of energy efficiency class D

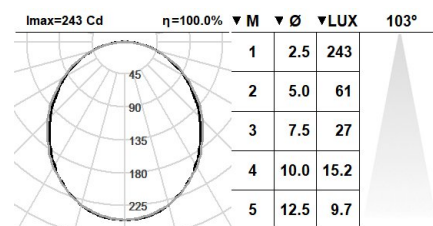

Electronic Equipment

S: On/Off


D: DALI-2/DSI switchDIM/corridorFUNCTION

*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com

www.rovasi.com